

GS-2406T PLUS

SURPASS SERIES

-- 4inch Direct Thermal & Thermal Transfer Barcode Printer



KEY FEATURES


- High-quality process design / clamshell double-wall sturdy structure / reliable performance
- Automatic label calibration for convenient user operation
- Multiple connectivity: Bluetooth/ Serial / Ethernet / Wi-Fi
USB / USB Host
- Ideal for manufacturing / warehouse management
healthcare / enterprise assets management and more



SURPASS SERIES

4" Desktop Thermal Transfer Barcode Printer

MODEL	GS-2406T PLUS	GS-3405T PLUS
Level	Standard	Standard
Resolution	8dots/mm (203DPI)	12dots/mm (300DPI)
Printing Method	Thermal Transfer & Direct Thermal	
Max.print speed	152mm(6")/second	127mm(5")/second
Max.print width	104 mm (4.1 ")	108.4 mm (4.27 ")
Memory RAM	64 MB SDRAM	
Memory ROM	32 MB Flash Memory	
Interface	<ul style="list-style-type: none"> • USB 2.0 High Speed 480Mbps • USB Host 2.0, for scanner or PC keyboard • RS-232 	<ul style="list-style-type: none"> • Internal Ethernet 10/ 100Mbps • Internal Bluetooth 4.0 (distributor option) • Internal WiFi (distributor option)
Internal fonts	<ul style="list-style-type: none"> • 8 alpha-numeric bitmap fonts • True type font engine (need download scalable font file) 	
1D Barcode	Code 11, Code 39, Code 93, Code 128 (subsets A, B, C), UPC-A, UPC-E, UCC-128, Codabar, EAN/JAN-8, EAN/JAN-13, Interleaved 2 of 5, ITF14, MSI Plessey, PostCode, Telepen	
2D Barcode	QR Code, Micro QR Code, PDF417, Micro PDF417, Grid Matrix, MaxiCode, Aztec Code, Data Matrix	
Rotation	Font and barcode support 0, 90, 180, 270 degree	
Printer language	Compatible to TSPL, EPL, ZPL, ZPL II, DPL	
Physical dimension	200 mm (W) * 182 mm (H) * 280 mm (D)	
Weight	2.5kg	

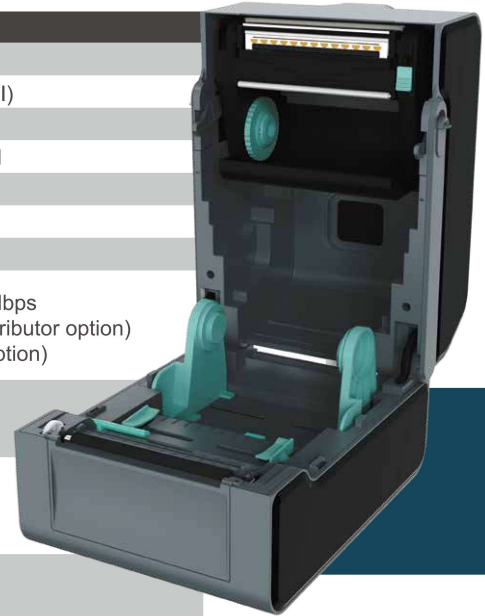

Enclosure
ABS plastic

User options
External roll mount

Environment concern options
Comply with RoHS, REACH, WEEE

Certification
FCC Class A, CE Class A, CCC, BIS, CB

APPLICATIONS

- Retail
- Shelf labeling
- Shipping
- Office
- Patient safety
- Healthcare
- Inventory management
- Product marking

