

# SRP-B300

Impresora térmica de punto de venta de 3 pulgadas



Venta minorista



Restaurante de comida rápida




Venta de entradas



Ocio

## Compacto y costo eficiente

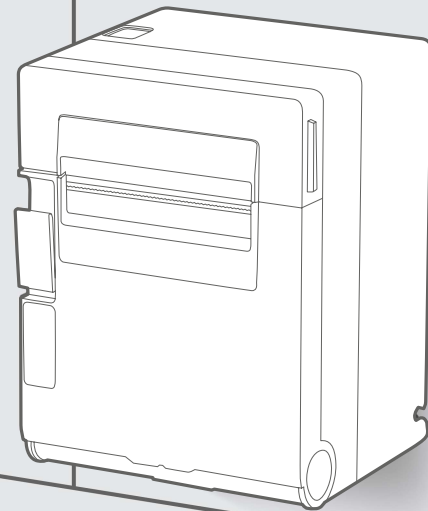


203  
dpi

200  
mm/sec



### Rendimiento eficiente

- Velocidad de impresión de hasta 220 mm/seg
- Resolución de impresión de 203 dpi
- B-Melodist opcional
- Alarma Única o continua de notificación de pedidos (Opcional)

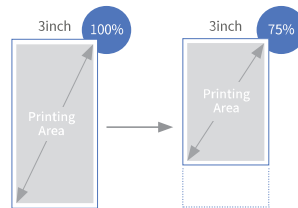

### Operación Económica

- Interfaz All-In-One Plus™: USB, Red y Serial
- Modo de ahorro de papel, reduciendo la longitud del recibo hasta un 25%
- Certificado Energy Star



### Diseño fácil de usar

- Uso independiente o montado en la pared
- Mantenimiento fácil
- Compacto y ahorrando espacio
- LED a color

**BIXOLON**  
a Better Solution for your Business™

# SRP-B300

Impresora térmica de punto  
de venta de 3 pulgadas

## Specifications

### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

200 mm/sec

**Print Resolution**

203 dpi

**Print Width**

72mm

**Sensor**

Paper End

### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm

**Media Roll Diameter**

Up to 83 mm

**Media Thickness**

0.05 ~ 0.08mm

**Supply Method**

Easy Paper Loading

### Physical Characteristics

**Dimensions (W x D x H)**

132 x 178.4 x 124.7 mm  
(5.19 x 7.02 x 4.90 inch)

**Weight**

1.01 kg (2.23 lbs.)

**Electrical**

EnergyStar Certified,  
External Power Adaptor 100-240V AC,  
50/60Hz

**Drawer Port**

2 ports (via y-type adaptor)

### Performance Characteristics

**NV Image Memory**

768 Kbytes (mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

USB V2.0 FS + Ethernet + Serial

### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)  
Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH  
Storage: 10 ~ 90% RH

### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver  
OPOS / JPOS Driver  
Linux / Mac CUPS Driver  
Virtual COM USB Driver  
Utility Program

**SDK / Plugin**

Android / iOS / Windows SDK  
Linux SDK  
Xamarin SDK  
Chrome SDK  
Cordova Plugin

**Application**

mPrint App (Android, iOS)

### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24  
KOR, CHN, JPN: 24 x 24

**Characters Per Line**

Font A: 48 Font B, C: 64  
KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95  
Extended Graphics: 128 x 35 page  
International: 32

**Graphics**

Supporting user-defined fonts, graphics,  
formats and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128,  
EAN-8, EAN-13, ITF, UPC-A, UPC-E  
2D: Data Matrix, PDF417, QR Code

### Accessories

**Standard**

USB A-B Cable 1.8m

**Optional**

External buzzer, B-Melodist,  
Serial Cable (9-9pin)



BR\_SRP-B300\_ES\_JAN22\_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

**BIXOLON**

www.BIXOLON.com

**BIXOLON Co.,Ltd.**

+82 31 218 5500  
sales@bixolon.com

**BIXOLON America Inc.**

+1 858 764 4580  
sales@bixolonusa.com

**BIXOLON Europe GmbH**

+49 211 68 78 54 0  
sales@bixolon.de

**BIXOLON MEA**

+971 4 222 6480  
russell@bixolon.com